

1800-D Series

LED Architectural Down Cylinder

Type:

Catalog Number:

Project/Location:

Approved By:

SPECIFICATIONS

Housing: Heavy-duty construction of corrosion resistant extruded aluminum. Stainless steel hardware.

Gasket: Closed cell silicone foam gasket. Seals out moisture, dust, and insects for weather-tight operation.

Mounting: Surface (S), Wall (W), or Pendant Mount (PM) over standard J-box.

Lens: 1/8" thick clear tempered glass.

Driver: Constant current and Universal input voltage 120-277V, 50-60Hz line voltage frequency. Operating temperature -20°C to 40°C, Power Factor $\geq .90$.

LED: Specify amber (A), blue (B), green (G), red (R), or 3000 (30K), 3500 (35K), 4000 (40K), and 5000K (50K). 40K Standard.

Lumens: 3100.

Finish/Colors: Zinc based primer with polyester powder coat finish in Matte Black (MB), Matte White (MW), Matte Bronze (BZ), Silver Gray (SG), or a custom color (CC).

Testing: LM79, LM80, ETL.
Conforms to UL Standard 1598. Suitable for wet locations.

Options:

BR Black baffle regressed lens
FLA Harsh environment finish
TF Turtle Friendly 590 nm Amber LED

Down Light available in 6" or 8" DIA.

See options page for additional information or consult factory.





EMERGENCY BATTERY
BACKUP AVAILABLE

Series	Source	Wattage/Max
1800-D	LED	28W

ORDERING EXAMPLE

1800-D – 28WLED – 40K – 120 – MB

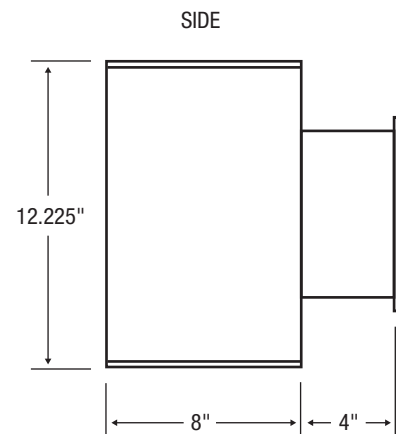

ELCAST LIGHTING

815 S. Kay Ave., Addison, IL 60101 USA • 630.543.5390
www.ElcastLtg.com • ElcastLtg@ElcastLtg.com

Made in USA – 5 year limited warranty

©2017. Specifications are subject to change without notice. Consult factory for verification.

REV 04-19