

TF-1808-WA Series



LED Architectural Pendant Mount

Type:

Catalog Number:

Project/Location:

Approved By:

SPECIFICATIONS

Housing: 2447 white acrylic tubing.

Mounting: Pendant mount with 1/16" diameter, 8' stainless steel adjustable aircraft cables or 3/8" round stem with canopy.

Drivers: Solid state electronic driver constant current 0-10V dimming, universal (120-277V).

LED: Specify amber (A), blue (B), green (G), red (R), or 3000 (30K), 3500 (35K), 4000 (40K), and 5000K (50K). 40K Standard.

Lumens: 1155

Power Cord: White power cord.

Finish/Colors: Zinc based primer with polyester powder coat finish in Matte Black (MB), Matte White (MW), Matte Bronze (BZ), Silver Gray (SG), or a custom color (CC).

Testing: LM79, LM80, ETL.

Conforms to UL Standard 1598. Suitable for wet locations.

Options:

FLA Harsh environment finish

TF Turtle Friendly 590 nm Amber LED

Down Light, Surface or Pendant Mounts available in various sizes.


See options page for additional information or consult factory.



Series	Source	Wattage/Max
TF-1808-WA	LED	30W

ORDERING EXAMPLE

TF-1808-WA – 48" – 30WLED – A – 120

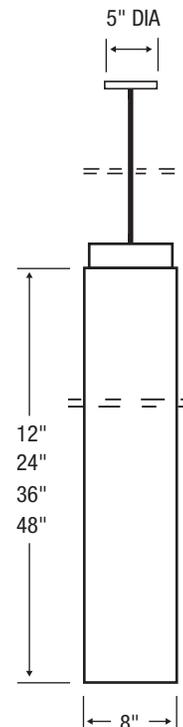

ELCAST LIGHTING

815 S. Kay Ave., Addison, IL 60101 USA • 630.543.5390
www.ElcastLtg.com • ElcastLtg@ElcastLtg.com

Made in USA – 5 year limited warranty

©2017. Specifications are subject to change without notice. Consult factory for verification.