

1808-WA Series

LED Architectural Pendant Mount

Type:

Catalog Number:

Project/Location:

Approved By:

SPECIFICATIONS

Housing: 2447 white acrylic tubing.

Mounting: Pendant mount with 1/16" diameter, 8' stainless steel adjustable aircraft cables or 3/8" round stem with canopy.

Drivers: Solid state electronic driver constant current 0-10V dimming, universal (120-277V).

LED: Specify amber (A), blue (B), green (G), red (R), or 3000 (30K), 3500 (35K), 4000 (40K), and 5000K (50K). 40K Standard.

Options:

12"	1500 Lumens body
24"	3000 Lumens body
36"	4500 Lumens body
48"	6000 Lumens body

Power Cord: White power cord.

Finish/Colors: Zinc based primer with polyester powder coat finish in Matte Black (MB), Matte White (MW), Matte Bronze (BZ), Silver Gray (SG), or a custom color (CC).

Testing: LM79, LM80, ETL.

Conforms to UL Standard 1598. Suitable for damp locations.


*Down Light, Surface or Pendant Mounts available in various sizes.
See options page for additional information or consult factory.*



Series	Source	Wattage/Max
1808-WA	LED	60W

ORDERING EXAMPLE

1808-WA – 48" – LED(30K) – 120V – AL – DIM

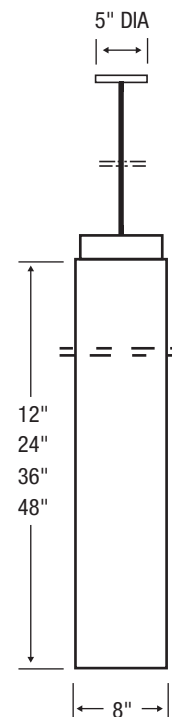

ELCAST LIGHTING

815 S. Kay Ave., Addison, IL 60101 USA • 630.543.5390
www.ElcastLtg.com • ElcastLtg@ElcastLtg.com

Made in USA – 5 year limited warranty

©2017. Specifications are subject to change without notice. Consult factory for verification.

REV 09-21