

# 1808-WA Series

## LED Architectural Pendant Mount

Type:

Catalog Number:

Project/Location:

Approved By:

### SPECIFICATIONS

**Housing:** 2447 white acrylic tubing.

**Mounting:** Pendant mount with 1/16" diameter, 8' stainless steel adjustable aircraft cables or 3/8" round stem with canopy.

**Drivers:** Solid state electronic driver constant current 0-10V dimming, universal (120-277V).

**LED:** Specify amber (A), blue (B), green (G), red (R), or 3000 (30K), 3500 (35K), 4000 (40K), and 5000K (50K). 40K Standard.

**Options:**

12"	1500 Lumens body
24"	3000 Lumens body
36"	4500 Lumens body
48"	6000 Lumens body

**Power Cord:** White power cord.

**Finish/Colors:** Zinc based primer with polyester powder coat finish in Matte Black (MB), Matte White (MW), Matte Bronze (BZ), Silver Gray (SG), or a custom color (CC).

**Testing:** LM79, LM80, ETL.

Conforms to UL Standard 1598. Suitable for damp locations.

*Down Light, Surface or Pendant Mounts available in various sizes.  
See options page for additional information or consult factory.*




EMERGENCY BATTERY  
BACKUP AVAILABLE

Series	Source	Wattage/Max
1808-WA	LED	60W

### ORDERING EXAMPLE

1808-WA – 48" – LED(30K) – 120V – AL – DIM

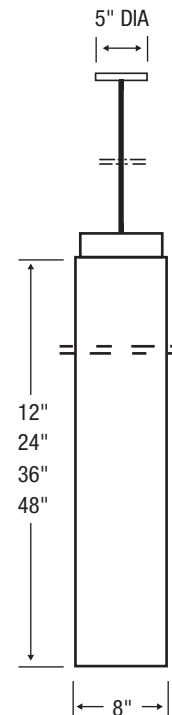

## ELCAST LIGHTING

815 S. Kay Ave., Addison, IL 60101 USA • 630.543.5390  
www.ElcastLtg.com • ElcastLtg@ElcastLtg.com

**Made in USA** – 5 year limited warranty

©2017. Specifications are subject to change without notice. Consult factory for verification.

REV 08-21