

TF-1850 Series



LED Architectural Down Only Cylinder

Type:

Catalog Number:

Project/Location:

Approved By:

SPECIFICATIONS

Housing: One-piece, heavy-duty (.250) extruded aluminum housing. Die-cast aluminum top piece. Stainless steel hardware.

Gasket: Closed cell silicone foam gasket. Seals out moisture, dust, and insects for weather-tight operation.

Mounting: Surface wall over standard J-box.

Lens: 1/8" thick tempered clear glass lens. Lens shall be retained to housing using die-cast aluminum ring.

Driver: Constant current and Universal input voltage 120-277V, 50-60Hz line voltage frequency. Operating temperature -20°C to 40°C, Power Factor $\geq .90$.

LED: Specify amber (A), blue (B), green (G), red (R), or 3000 (30K), 3500 (35K), 4000 (40K), and 5000K (50K). 40K Standard.

Lumens: 619 Amber.

Finish/Colors: Zinc based primer with polyester powder coat finish in Matte Black (MB), Matte White (MW), Matte Bronze (BZ), Silver Gray (SG), or a custom color (CC).

Testing: LM79, LM80, ETL.

Conforms to UL Standard 1598. Suitable for wet locations.

Options:

FLA Harsh environment finish

TF Turtle Friendly 590 nm Amber LED

Down Light, Surface or Pendant Mounts available in various sizes.

See options page for additional information or consult factory.




Series	Source	Wattage/Max
TF-1850	LED	14W
TF-1850	LED	18W

ORDERING EXAMPLE

TF-1850 – 14WLED – A – UNV – BZ



SIDE

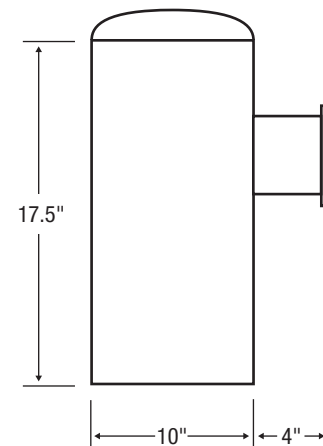

ELCAST LIGHTING

815 S. Kay Ave., Addison, IL 60101 USA • 630.543.5390
www.ElcastLtg.com • ElcastLtg@ElcastLtg.com

Made in USA – 5 year limited warranty

©2017. Specifications are subject to change without notice. Consult factory for verification.

REV 02-20