

1216-1-F Series

Medical High Security

Designed specifically for specialized medical and behavioral health installations, these high-performance step/marker lights are engineered to meet the highest standards of patient safety and facility security. Key features are the sloped anti-ligature lens frame with polycarbonate lens and tamper-proof screws to prevent unauthorized access or vandalism. An optional integrated photocell provides switchless operation when other illumination is off.* Should your facility require design modifications, please contact our sales department for additional solutions.

SPECIFICATIONS

Gasket: Silicone gasket seals out moisture, dust, and insects for weather-tight operation.

Mounting: Recessed wall or optional surface box.

Lens: Impact resistant UV stabilized polycarbonate.

Driver: Solid state electronic constant current. Input voltage 120 or 277V under 6 LED. UNV voltage over 6 LED. Operating temperature -20°C to 40°C, Power Factor \geq .90.

LED: Specify amber (A), blue (B), green (G), red (R), or 3000 (30K), 3500 (35K), 4000 (40K), and 5000K (50K) – 40K Standard.

Lumens: 230.

Finish/Colors: Zinc based primer with polyester powder coat finish in Matte Black (MB), Matte White (MW), Matte Bronze (BZ), Silver Gray (SG), or a custom color (CC).

Testing: LM79, LM80, ETL.
Conforms to UL Standard 1598. Suitable for wet locations.

Options:

- DIM Dimming 0-10 Volt
- FLA Harsh Environment Finish
- PO Photo Control
- TF Turtle Friendly 590 nm Amber LED

See options page for additional information or consult factory.




Series	Source	Max Wattage
1216-1-F	LED	6W (standard)

ORDERING EXAMPLE


1216-1-F – 6WLED – 40K – 120 – SG
1216-1-F-PO – 6WLED – 40K – 120 – SG

ELCAST LIGHTING


815 S. Kay Ave., Addison, IL 60101 USA • 630.543.5390
www.ElcastLtg.com • ElcastLtg@ElcastLtg.com

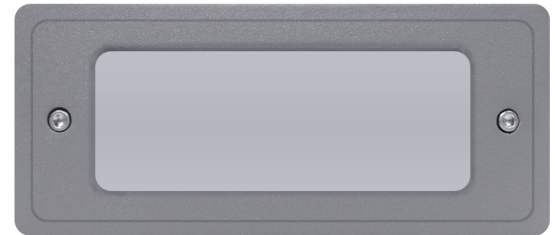


FRONT VIEW

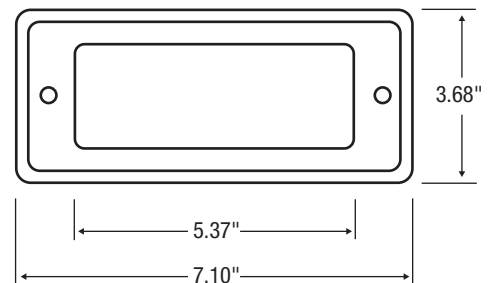

SIDE VIEW

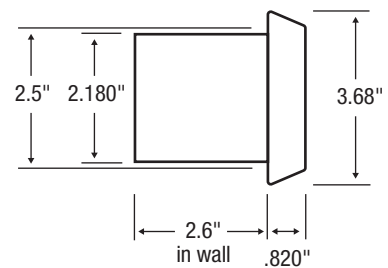

*OPTIONAL PO

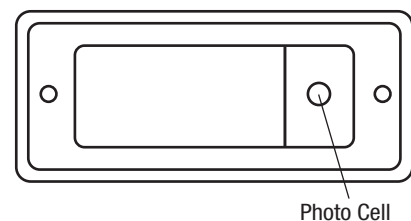

Made in USA – 5 year limited warranty

©2017. Specifications are subject to change without notice. Consult factory for verification.